



350 S. St. Charles St. Jasper, In. 47546
Ph. 812.482.2932 Fax 812.634.6632

www.ridetech.com

Part # 11100298
61-64 Cadillac Air Suspension System

Front Components:

1 11102401 Front HQ Series Shockwave for Stock Lower Arms

Rear Components:

1 11104099 Rear CoolRide Kit

1 11100701 HQ Series Rear Shocks



350 S. St. Charles St. Jasper, In. 47546
Ph. 812.482.2932 Fax 812.634.6632
www.ridetech.com

Part # 11102401
61-64 Cadillac HQ Series Front ShockWaves

Shockwave:

2	24090199	Master Series 255c bellow assembly
2	982-10-802	2.6" stroke HQ series shock
2	90001994	.625" bearing
4	90001995	Bearing snap ring
2	90009989	2.75" Stud top
2	234-00-135	Locking Ring

Components:

2	90002313	2.75" Stud top base
2	90001902	Aluminum cap for Delrin ball
2	90001903	Delrin ball upper half
2	90001904	Delrin ball lower half
2	90002067	.625" bearing spacer
4	90000457	(A538) Lower Spacer
4	90000456	(A537) Lower Bracket

Hardware:

2	99562003	9/16" SAE Nylok Jam Nut	Stud Top
2	99622006	5/8 thin nyloc	Lower Mount
2	99621007	5/8 X 5 Gr. 8 SAE Bolt	Lower Mount
8	99623001	5/8 SAE Flat washers	Lower Mount

WARNING: ATTEMPTING TO REMOVE THE AIR FITTING WILL DAMAGE IT AND VOID THE WARRANTY.


ridetech

1. Raise and support vehicle at a safe, comfortable working height. Let the front suspension hang freely.
2. Remove coil spring and shock absorber. Refer to service manual for proper disassembly procedure.



3. The white mark indicates where the coil spring pocket will need to be trimmed for air spring clearance. Make sure the bag cannot touch the frame at any point though full suspension travel. **Check clearance between the top of the Shockwave and the upper coil spring retainer.**

4. The coil spring retainer on the lower control arm must also be cut off for Shockwave clearance. See picture below.

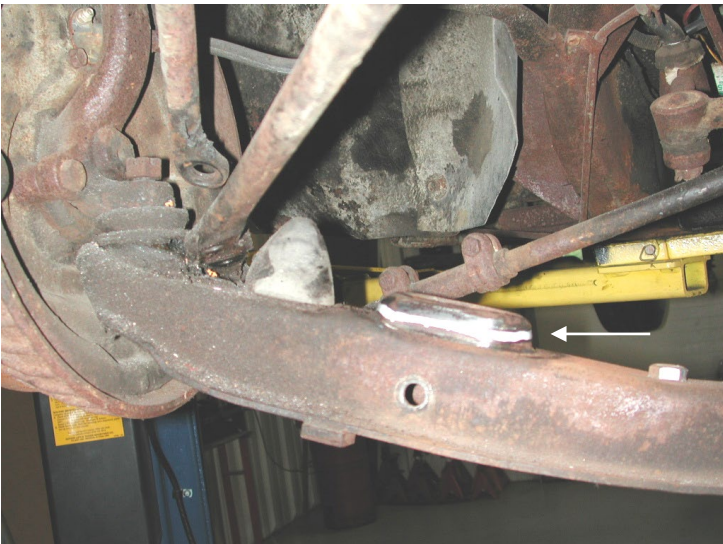

5. Airline must also be routed at this time. Use a grommet if needed when passing through the frame.

6. Install the aluminum stud top base over the stud top, then the bottom Delrin ball half. Place stud through oem shock hole (may need to be drilled to $\frac{3}{4}$ "), then place upper Delrin ball over stud, then aluminum cap. Secure with two 9/16" jam nuts.




7. Drill shock hole in arm to 5/8".

8. Insert 5/8" x 5" bolt through plate, control arm, spacer, and shockwave as shown in diagram.

Double check to make sure the air spring cannot touch the frame at any point through full suspension travel. Driving pressure should be around 105psi, but can vary.

1. Tall Delrin stud top base
2. Delrin ball lower half
3. Delrin ball upper half
4. Aluminum cap
5. 9/16" SAE nyloc nut
6. Tall Delrin stud top
7. Black adjustment knob
8. Detent clip
9. Screw
10. Washer

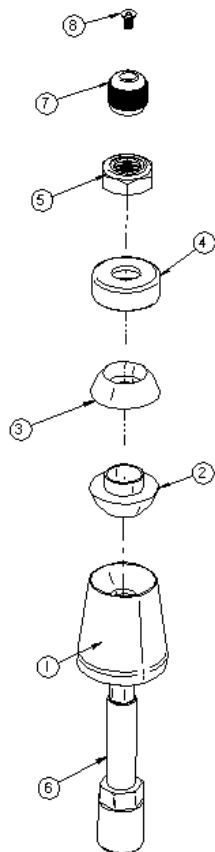

Shock adjustment 101- Single Adjustable

Rebound Adjustment:

How to adjust your new shocks.

The rebound adjustment knob is located on the top of the shock absorber protruding from the eyelet.

You must first begin at the ZERO setting, then set the shock to a soft setting of 20.



-Begin with the shocks adjusted to the ZERO rebound position (full stiff). Do this by rotating the rebound adjuster knob clockwise until it stops.



-Now turn the rebound adjuster knob counter clock wise 20 clicks. This sets the shock at 20. (settings 21-24 are typically too soft for street use).

Take the vehicle for a test drive.



-if you are satisfied with the ride quality, do not do anything, you are set!



-if the ride quality is too soft increase the damping effect by rotating the rebound knob clock wise 3 clicks.

Take the vehicle for another test drive.



-if the vehicle is too soft increase the damping effect by rotating the rebound knob clock wise 3 additional clicks.



-If the vehicle is too stiff rotate the rebound adjustment knob counter clock wise 2 clicks and you are set!

Take the vehicle for another test drive and repeat the above steps until the ride quality is satisfactory.

Note:

One end of the vehicle will likely reach the desired setting before the other end. If this happens stop adjusting the satisfied end and keep adjusting the unsatisfied end until the overall ride quality is satisfactory.

The care and feeding of your new ShockWaves

1. Although the ShockWave has an internal bumpstop, **DO NOT DRIVE THE VEHICLE DEFLATED RESTING ON THIS BUMPSTOP. DAMAGE WILL RESULT.** The internal bumpstop will be damaged, the shock bushings will be damaged, and the vehicle shock mounting points may be damaged to the point of failure. **This is a non warrantable situation.**
2. Do not drive the vehicle overinflated or "topped out". Over a period of time the shock valving will be damaged, possibly to the point of failure. **This is a non warrantable situation!** If you need to raise your vehicle higher than the ShockWave allows, you will need a longer unit.
3. The ShockWave is designed to give a great ride quality and to raise and lower the vehicle. **IT IS NOT MADE TO HOP OR JUMP!** If you want to hop or jump, hydraulics are a better choice. This abuse will result in bent piston rods, broken shock mounts, and destroyed bushings. **This is a non warrantable situation.**
3. Do not let the ShockWave bellows rub on anything. Failure will result. **This is a non warrantable situation.**
4. The ShockWave product has been field tested on numerous vehicles as well as subjected to many different stress tests to ensure that there are no leakage or durability problems. Failures have been nearly nonexistent unless abused as described above. If the Shockwave units are installed properly and are not abused, they will last many, many years. **ShockWave units that are returned with broken mounts, bent piston rods, destroyed bumpstops or bushings, or abrasions on the bellows will not be warranted.**



350 S. St. Charles St. Jasper, In. 47546
Ph. 812.482.2932 Fax 812.634.6632
www.ridetech.com

Part # 11104099
58-64 Cadillac Rear CoolRide Kit

Components:

2	90006873	Air spring – 8" diameter, double convoluted, 1/4" port
2	90000455	Upper cup bracket
2	90000070	Air spring roll plate

Hardware kit:

4	99372002	3/8" USS Nylok nut	Air spring to upper cup bracket
4	99373003	3/8" SAE flat washer	Air spring to upper cup bracket
2	99435002	7/16" x 8" stud	Cup bracket to frame
2	99432001	7/16" Nylok nut	Cup bracket to frame
2	99433002	7/16" flat washer	Cup bracket to frame
2	99371008	3/8" x 3 1/2" bolt	Air spring to trailing arm
2	99373001	3/8" fender washer	Air spring to trailing arm
2	99373005	3/8" lock washer	Air spring to trailing arm

***** For Use With RideTech Rear Shock Kit *****

1. Raise and support vehicle at a safe and comfortable working height.
2. Support axle then remove coil spring and shock. Refer to service manual for proper disassembly procedure.



3. The lower coil spring retainer must be removed by cutting the welds. Grind all sharp edges smooth.



4. Install airline fitting into airspring using thread sealant. The airline will also need to be routed at this time. Bolt the upper cup bracket to the top of the airspring using the two 3/8" nyloc nuts supplied.

5. Thread the 8" all tread into the nut at the bottom of the cup and insert through existing hole in the upper coil spring pocket. This hole must be drilled open to 7/16". Cut off extra threads.



6. Use the 3/8" x 3 1/2" bolt and lower plate to secure bag to the lower arm.

7. Install the new shock into the oem location.

8. Make sure the bag cannot touch anything through full suspension travel.



350 S. St. Charles St. Jasper, In. 47546
Ph. 812.482.2932 Fax 812.634.6632

www.ridetech.com

Part # 11100701
61-64 Cadillac Rear HQ Series Shock Kit

Shock:

2 986-10-053 RQ Smooth Body Shock Cartridge

Components:

8 70011140 Stem Bushings

8 70011141 Stem Washers

Hardware:

8 99372006 3/8" - 24 Thin Jam Nut Upper Shock Stud

